DRAWING AMENDMENTS

Applicants submit concurrently herewith one sheet of a replacement drawing amending Figure 4 of the present Application. The reference character for the "CS#" pin has been changed from "426" to "427." As a result, the reference character "426" only refers to the "SO" pin of Figure 4. Appropriate changes to the specification have also been made to reflect the amended reference character for the "CS#" pin. No new matter has been added.

Applicants respectfully request that the Examiner approve Figure 4 as amended.

RECEIVED

NOV 1 3 2003

Technology Center 2100

CYPR-CD00205
Examiner: Casiano, A.

2 Serial No.: 09/778,233

Group Art Unit: 2182



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of:

Hauck et al.

Serial No.: 09/778,233

Filed: February 6, 2001

For: METHOD AND APPARATUS FOR

AUTOMATIC DETECTION OF A

SERIAL PERIPHERAL

INTERFACE (SPI) DEVICE

MEMORY SIZE

Examiner: Casiano, A. 11-2603

Art Unit: 2182

RECEIVED

NOV 1 3 2003

Technology Center 2100

Commissioner for Patents P.O. Box 1450 Alexandria, VA 22313-1450

SUBMISSION OF PROPOSED DRAWING AMENDMENTS

Dear Sir:

Applicants submit herewith one sheet of a replacement drawing amending Figure 4 of the present Application. The reference character for the "CS#" pin has been changed from "426" to "427." As a result, the reference character "426" only refers to the "SO" pin of Figure 4. Appropriate changes to the specification have also been made to reflect the newly amended reference character for the "CS#" pin. No new matter has been added.

Applicants respectfully request that the Examiner approve Figure 4 as amended.

In accordance with current practice, Figure 4 will be incorporated into the formal drawings upon receipt of a Notice of Allowance and upon approval of the proposed Figure 4 by the Examiner.

Respectfully submitted,

WAGNER, MURABITO & HAO LLP

Date: 6 November 2003

Lin 🕊 🎜su

Reg. No.: 46,315

Two North Market Street
Third Floor
San Jose, California 95113
(408) 938-9060

Group Art Unit: 2182



400

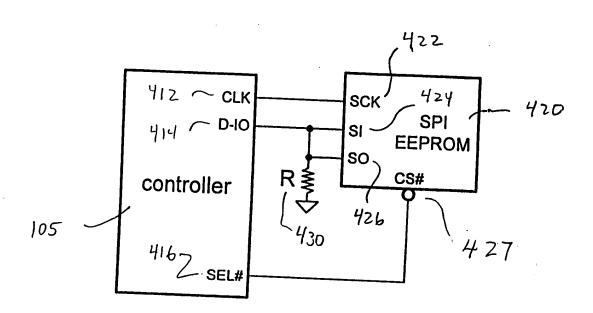


Fig. 4